

## PRODUCT SPECIFICATIONS

### 158EIA-158EIA-90

#### TeleDelta Right Angle 1-5/8EIA Adaptor

1-5/8EIA to 1-5/8EIA Right Angle Adaptor



### Electrical Specifications

<b>Interface A:</b>	1-5/8 EIA Male
<b>Interface B:</b>	1-5/8 EIA Female
<b>Operational Frequency Range:</b>	0 ~ 3000 MHz
<b>Impedance:</b>	50 Ω (+/- 2 Ω)
<b>VSWR:</b>	<1.09 @ DC-1000Mhz
<b>Continuous Power:</b>	3.4KW @ 900Mhz
<b>Peak Power:</b>	90KW
<b>Insulation Resistance</b>	5000 Megaohms (minimum)

### Mechanical Specifications

<b>Body:</b>	Brass
<b>Insulation:</b>	PTFE
<b>Inner Conductor:</b>	Bronze (Ag)
<b>Gasket:</b>	Silicone Rubber
<b>Hardware Kit:</b>	Stainless Steel (nuts / bolts / washer)
<b>Coupling Element:</b>	1x Included

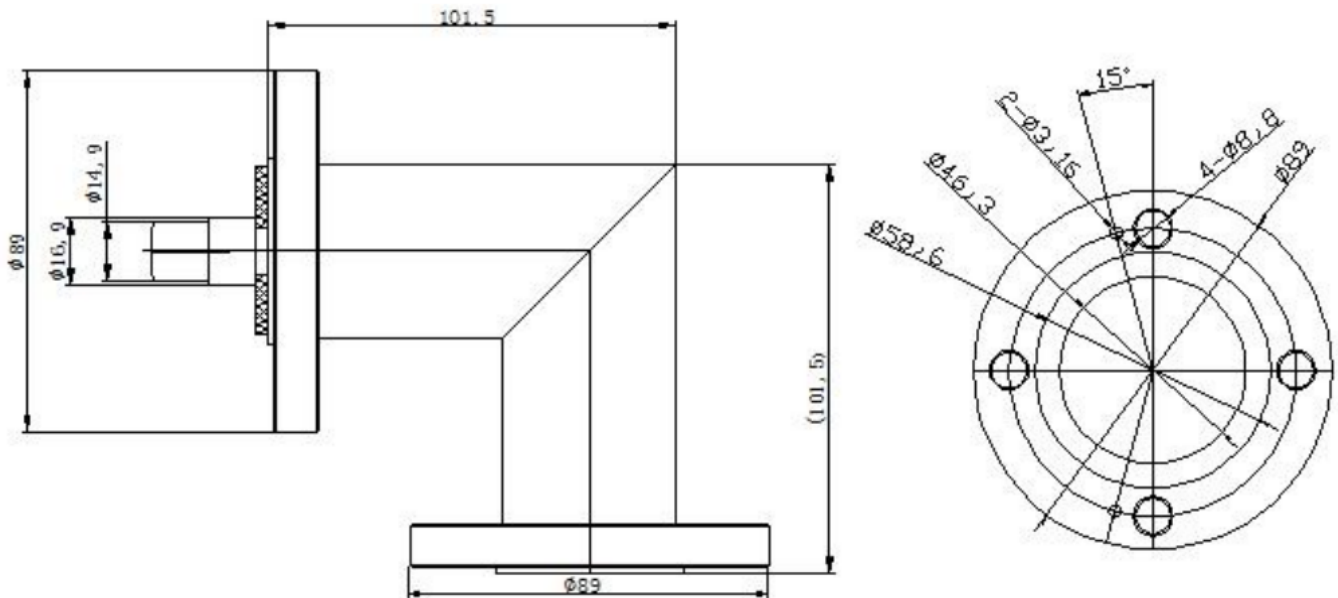
### Environmental Specifications

<b>Temperature Range:</b>	-45 ~ +85
<b>Waterproofing:</b>	IP67

## PRODUCT SPECIFICATIONS

**158EIA-158EIA-90****TeleDelta Right Angle 1-5/8EIA Adaptor**

1-5/8EIA to 1-5/8EIA Right Angle Adaptor

**Dimensions:****Ordering Part Number:****15/8EIA-158EIA-90**

1-5/8 EIA Male to 1-5/8 Female Right Angle Flange Connector

Includes 1x Inner Coupler and Hardware kit (nuts / bolts and washers)